

401 Series
Proven Reliability

UNCOMMON
VALUE
AT THE
BEST COST



Open the door to Anthony
and [Contact us today!](#)



The economical solution




Open the door to value and quality with Anthony's 401 Series doors. Designed as an entry-level door for applications requiring strong, robust and economical doors while still providing the value, wide range of sizes and multiple options that customers have grown accustomed to with Anthony.

- Wide range of sizes and options
- Increased viewing area for optimized merchandising
- Durable construction for long life
- LED lighting optional



401 Series | Proven Reliability

401 Series doors are the smart, economical choice for entry-level doors. You get high-quality design, construction, features and options normally found only in much more expensive door models. The 401 will bring you years of reliability and cost-effective performance.

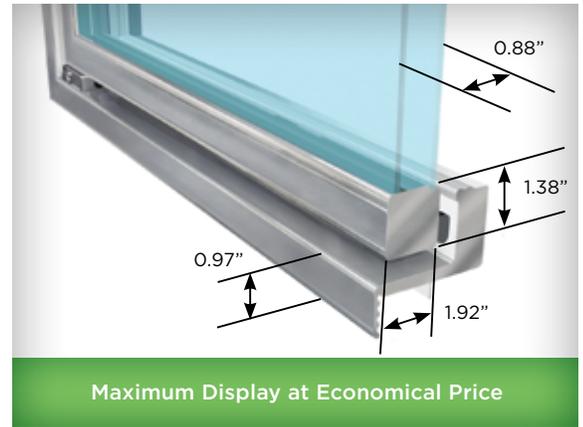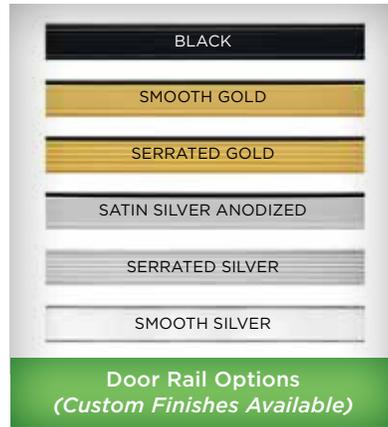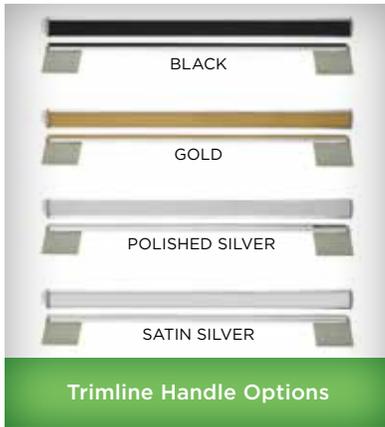

| SHELVING | SHELF DEPTH OPTIONS |
|---|---------------------|
| *Standard Shelving - (Five Shelves) Doors Less Than 79" | 24", 27", 36" |
| *Standard Shelving - (Six Shelves) Doors 79" or Taller | 24", 27", 36" |
| Gravity Flow Shelving (GFS) | 24", 27", 36", 42" |
| Gravity Flow Merchandising (GFM) | 42", 48", 60", 72" |
| Custom Shelving Available | |

*24" Shelf Depth Standard

| LIGHTING | FIXTURE SIZE (IN) | CCT (K) | POWER (W) | ILLUMINANCE (LUX)* | UNIFORMITY** |
|-------------------------------|--------------------|--------------|-----------------------------------|--------------------|--------------|
| Standard T8 Fluorescent | 24, 36, 48, 60, 72 | 4100 | 17 - 70 | 653 | 11.3 |
| 401 LED | 60 | 4000 | Center: 20 Left/Right: 12.5 | 885 | 9.9 |
| Optimax Pro 24 Low Power LED | 48, 54, 60, 72 | 3500 4000 | Left/Right: 7-9 Center: 14-18 | 825 | 1.2 |
| Optimax Pro 24 High Power LED | 48, 54, 60, 72 | 3500 4000 | Left/Right: 9-12 Center: 18-24 | 1100 | 1.3 |

*60" Lamp measured 4" from frame at door centerline

**60" Lamp ratio at 4" from frame along vertical centerline (Max:Min)

COMPARISON CHART:

| FEATURES: | 401 | 101 | ELIMINAATOR RENU |
|------------------------|-------|-------|------------------|
| Reversible | X | ✓ | ✓ |
| French Door Frame | X | ✓ | ✓ |
| Annual Operating Cost* | \$219 | \$166 | \$0 |

* Freezer Application, \$12 kWh Utility Rate, one 30" x 67" Door Only



Applications:

- Cooler and Freezer

Standard Features:

- T8 Fluorescent Lights
- Manual Hold-Open
- Electrical Hinge Pin
- Torque and Sag Adjust
- Magnetic Door Gaskets
- Trimline Handle
- White or Black Shelving with Galvanized Shelf Posts
- Standard Shelving - 24" Deep (Setback 6 3/4")
- EISA Compliant

Options:

- 2 or 3 Pane Heated/Non Heated Glass
- Pass-Thru Door Version (403)
- 401 LED
- Optimax Pro 24 LED
- Slimline Handle
- Full Length Handle
- Cylinder Lock
- POM Lock
- Energy Controller
- Extra Shelves
- Black/White Epoxy-Coated Shelf Posts
- Gravity Flow Shelving
- Gravity Flow Merchandising
- Anti-Fog

To order today, go to www.anthonyintl.com or call 800-772-0900.

101 Series

Heavy Traffic

BUILT STRONG
BUILT TO LAST
FOR HEAVY
TRAFFIC



Open the door to Anthony
and [Contact us today!](#)



Built Strong to Last Longer




Find value and energy efficiency paired with proven durability in Anthony's 101 Series doors. Designed to offer impressive energy efficiency standards, the 101 Series doors deliver dependability, superior thermal protection against condensation and the wide range of options customers have grown accustomed to with Anthony.

- Energy Free Cooler Door Design reduces energy to the frame by 30%
- Wide range of features and options
- Proven durability for long life
- Heated glass option



101 Series | Heavy Traffic

The 101 Series doors are the wise choice when it comes to energy efficiency and repetitive durability. Expect the 101 Series doors to deliver dependability and a long-term energy savings that provides value for years.

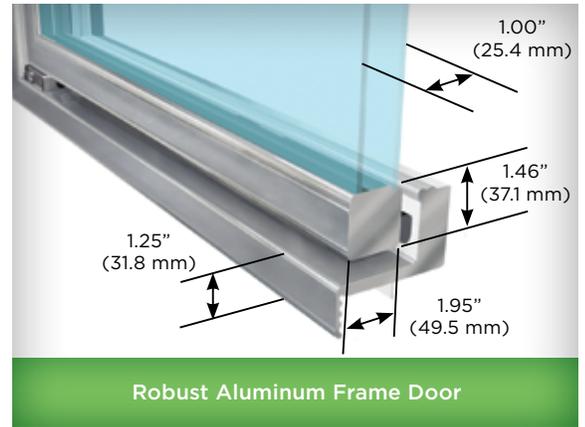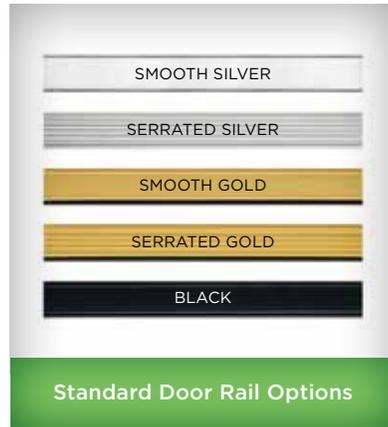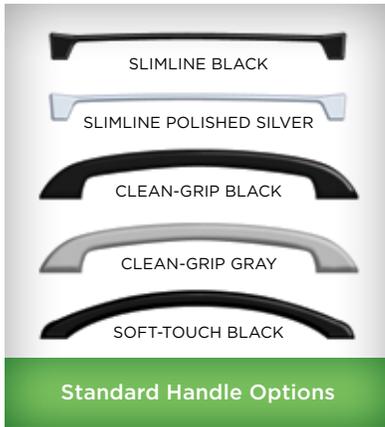

| SHELVING | SHELF DEPTH OPTIONS | | DOOR WIDTH OPTIONS | |
|--|---------------------|------------------------|--------------------|-----|
| | INCHES | MM | INCHES | MM |
| *Standard Shelving - (Five Shelves) Doors Less Than 79" (2 m) | 24, 27, 36 | 610, 686, 914 | 24 | 610 |
| *Standard Shelving - (Seven Shelves) Doors 79" (2 m) or Taller | 24, 27, 36 | 610, 686, 914 | 26 | 660 |
| Gravity Flow Shelving (GFS) | 24, 27, 36, 42 | 610, 686, 914, 1067 | 28 | 711 |
| Gravity Flow Merchandising (GFM) | 42, 48, 60, 72 | 1067, 1219, 1524, 1829 | 30 | 762 |
| Double Wide Shelving | 27, 36 | 686, 914 | | |

Custom Shelving Available

*27" (686 mm) Shelf Depth Standard

| LIGHTING | FIXTURE SIZE IN (MM) | CCT (K) | POWER (W) | ILLUMINANCE (LUX)* | UNIFORMITY** |
|-------------------------------|---|--------------|-----------------------------------|--------------------|--------------|
| Standard T-8 Fluorescent | 24, 36, 48, 60, 72 (610, 914, 1219, 1524, 1829) | 4100 | 17 - 70 | 653 | 11.3:1 |
| Optimax Pro 24 Low Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 7-9 Center: 14-18 | 1100 | 1:1:1 |
| Optimax Pro 24 High Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 9-12 Center: 18-24 | 1400 | 1:1:1 |

*60" (1524 mm) Lamp measured 4" (102 mm) from frame at door centerline

**60" (1524 mm) Fixture ratio at 4" (102 mm) from frame along vertical centerline (Max:Min)

COMPARISON CHART:



| FEATURES: | 401 | 101 | ELIMINAATOR RENU |
|------------------------|-------|-------|------------------|
| Reversible | X | ✓ | ✓ |
| French Door Frame | X | ✓ | ✓ |
| Annual Operating Cost* | \$219 | \$166 | \$0 |

* Freezer Application, \$.12 kWh Utility Rate, one 30" x 67" Door Only



Applications:

- Cooler and Freezer

Standard Features:

- T-8 Fluorescent Lights
- Automatic Hold-Open
- Electrical Hinge Pin
- Torque and Sag Adjust
- Reversible Door Swing
- Magnetic Door Gaskets
- Standard Shelving - 27" Deep (Setback 6 3/4")
- White or Black Shelving with Galvanized Shelf Posts
- EISA Compliant

Options:

- 2 or 3 Pane Heated/Non Heated Glass
- Energy-Free Cooler Door
- French Door Frame (Cooler Application Only)
- Pass-Thru Door Version (103)
- Optimax Pro 24 LED
- ELS T-8
- Satin Silver Anodized Door Rail
- Slimline Gold or Satin Silver Handle
- Full Length Handle
- Electronic, Cylinder or POM Lock
- Energy Controller
- Decorator Tape
- Extra Shelves
- Black/White Epoxy-Coated Shelf Posts
- Anti-Fog

To order today, go to www.anthonyintl.com or call 800-772-0900.

Vista® B

Optimum Visibility

THE VIEW
WITH ULTIMATE
PRODUCT
VISIBILITY



Open the door to Anthony
and [Contact us today!](#)



Vista Arch Handle



Clamp Glass Lock

 **Anthony**®
A **DOVER** COMPANY

Innovating
What's
Next






The No-Barriers View

The Anthony® Vista® B delivers an unobstructed view that creates the feeling of having no barrier between the customer and merchandise. The thin profile, all-glass doors offer durability and feature the exclusive Vista Arch handle to minimize any perceived barrier and to enhance clear product visibility.

- Single- or double-door sets
- Thin profile all-glass doors
- Exclusive Vista Arch handle
- Enhanced customer comfort in warmer aisles
- Maximum merchandising visibility

Vista[®] B | Optimum Visibility

Anthony's Vista B presents customers with a perfectly unobstructed view of the products. Available as single- or double-door sets, the Vista B provides attractive style with the durability Anthony customers have come to expect.

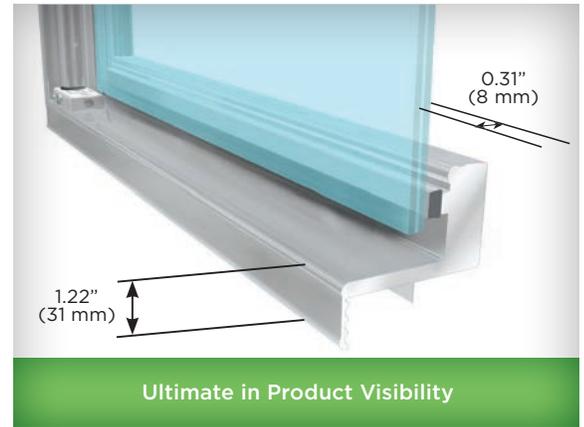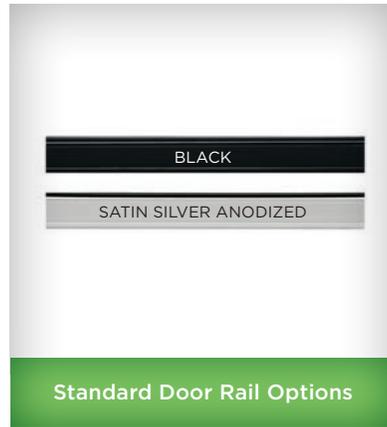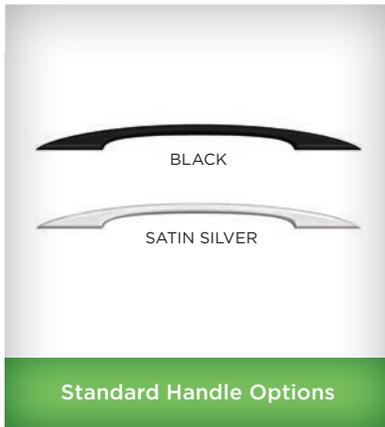

| SHELVING | SHELF DEPTH OPTIONS | | DOOR WIDTH OPTIONS | |
|--|---------------------|------------------------|--------------------|-----|
| | INCHES | MM | INCHES | MM |
| *Standard Shelving - (Five Shelves) Doors Less Than 79" (2 m) | 24, 27, 36 | 610, 686, 914 | 24 | 610 |
| *Standard Shelving - (Seven Shelves) Doors 79" (2 m) or Taller | 24, 27, 36 | 610, 686, 914 | 26 | 660 |
| Gravity Flow Shelving (GFS) | 24, 27, 36, 42 | 610, 686, 914, 1067 | 28 | 711 |
| Gravity Flow Merchandising (GFM) | 42, 48, 60, 72 | 1067, 1219, 1524, 1829 | 30 | 762 |
| Double Wide Shelving | 27, 36 | 686, 914 | | |

Custom Shelving Available

*27" (686 mm) Shelf Depth Standard
Standard Shelf Setback Dimensions - 6 9/16" (167 mm) front of shelf, 6 3/4" (172 mm) front of post

| LIGHTING | FIXTURE SIZE IN (MM) | CCT (K) | POWER (W) | ILLUMINANCE (LUX)* | UNIFORMITY** |
|-------------------------------|---|--------------|-----------------------------------|--------------------|--------------|
| Standard T-8 Fluorescent | 24, 36, 48, 60, 72 (610, 914, 1219, 1524, 1829) | 4100 | 17 - 70 | 653 | 11.3:1 |
| Optimax Pro 24 Low Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 7-9 Center: 14-18 | 1100 | 1.1:1 |
| Optimax Pro 24 High Power LED | 48, 54, 60, 72 (1219, 1372, 1524, 1829) | 3500 4000 | Left/Right: 9-12 Center: 18-24 | 1400 | 1.1:1 |

*60" (1524 mm) Lamp measured 4" (102 mm) from frame at door centerline
**60" (1524 mm) Fixture ratio at 4" (102 mm) from frame along vertical centerline (Max:Min)

COMPARISON CHART:

| FEATURES: | VISTA C | VISTA B | INFINITY 090 |
|------------------------|---------|---------|--------------|
| All-Glass Look | X | ✓ | ✓ |
| Reversible | ✓ | X | ✓ |
| French Door Frame | ✓ | ✓ | ✓ |
| Freezer Application | X | X | ✓ |
| Annual Operating Cost* | \$0 | \$232 | \$0 |

*Cooler Application, \$12 kWh Utility Rate, one 30" x 75" Door Only



Applications:

- Coolers
- Retrofit Designs
- Non-Refrigerated Merchandising

Standard Features:

- Automatic Hold-Open & Door Stop
- 2-Pane Heated Laminated Glass
- Electrical Hinge Pin
- Torque and Sag Adjust
- T-8 Lighting
- Black/White Epoxy Coated Rear Entry Shelving
- Galvanized Shelf Posts
- Compression Gasket Located on Frame for Longer Gasket Life
- Front-Loading Raceway and U-Shaped Mullion for Easy Service

Options:

- Anti-Fog
- French Door Frame
- Black/White Epoxy-Coated Shelf Posts
- Extra/36" Deep/Custom Shelves
- Double Wide Shelves
- Gravity Flow Shelving
- Premium Shelving with Mini-Roller System
- Optimax Shelf LED
- Optimax Pro 24 LED
- Clamp Glass Lock Set (2 per Door)
- POM Lock
- Zero Energy Door (Non-Refrigeration Only)
- Energy Controller (Smart Controller)
- Cloze Control[®]

To order today, go to www.anthonyintl.com or call 800-772-0900