


Innovating What's Next



THE VIEW

PRODUCT

'ISIBIL

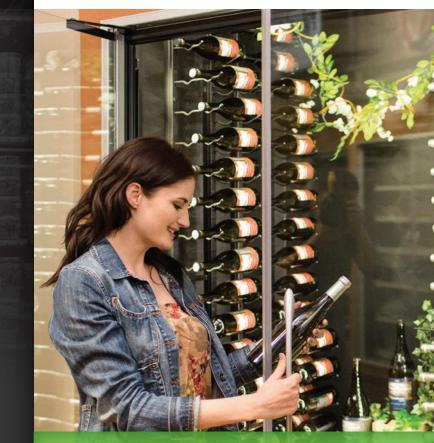

### The No-Barriers View

The Anthony<sup>®</sup> Vista<sup>®</sup> B delivers an unobstructed view that creates the feeling of having no barrier between the customer and merchandise. The thin profile, all-glass doors offer durability and feature the exclusive Vista Arch handle to minimize any perceived barrier and to enhance clear product visibility.

- Single- or double-door sets
- Thin profile all-glass doors
- Exclusive Vista Arch handle
- Enhanced customer comfort in warmer aisles
- Maximum merchandising visibility

Open the door to Anthony and Contact us today!








## Vista<sup>®</sup> B Optimum Visibility

Anthony's Vista B presents customers with a perfectly unobstructed view of the products. Available as single- or double-door sets, the Vista B provides attractive style with the durability Anthony customers have come to expect.

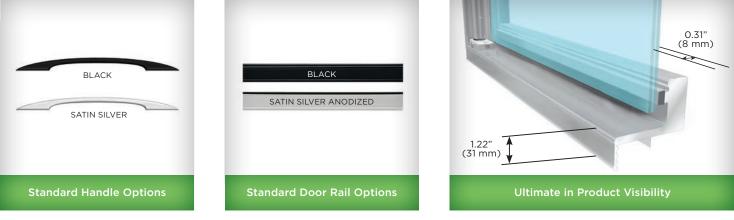

SHELVING	SHELF DI	EPTH OPTIONS	DOOR WIDTH OPTIONS				
	INCHES	MM	INCHES	MM			
*Standard Shelving - ( <i>Five Shelves</i> ) Doors Less Than 79" (2 m)	24, 27, 36	610, 686, 914	24	610			
*Standard Shelving - <i>(Seven Shelves)</i> Doors 79" (2 m) or Taller	24, 27, 36	610, 686, 914	26	660			
Gravity Flow Shelving (GFS)	24, 27, 36, 42	610, 686, 914, 1067	28	711			
Gravity Flow Merchandising (GFM)	42, 48, 60, 72	1067, 1219, 1524 1829	30	762			
Double Wide Shelving	27, 36	686, 914					
Custom Shelving Available							

\*27" (686 mm) Shelf Depth Standard

Standard Shelf Setback Dimensions - 6 9/16" (167 mm) front of shelf, 6 3/4" (172 mm) front of post

LIGHTING	FIXTURE SIZE IN (MM)	ССТ (К)	POWER (W)	ILLUMINANCE (LUX)*	UNIFORMITY**
Standard T-8 Flourescent	24, 36, 48, 60, 72 (610, 914, 1219, 1524, 1829)	4100	17 - 70	653	11.3:1
Optimax Pro 24 Low Power LED	48, 54, 60, 72 (1219, 1372, 1524, 1829)	3500 4000	Left/Right: 7-9 Center: 14-18	1100	1.1:1
Optimax Pro 24 High Power LED	48, 54, 60, 72 (1219, 1372, 1524, 1829)	3500 4000	Left/Right: 9-12 Center: 18-24	1400	1.1:1

\*60" (1524 mm) Lamp measured 4" (102 mm) from frame at door centerline \*\*60" (1524 mm) Fixture ratio at 4" (102 mm) from frame along vertical centerline (Max:Min)

# COMPARISON CHART:00000000000000FEATURES:VISTA CVISTA BINFINITY 090All-Glass LookXVVReversibleVXVFrench Door FrameVVFreezer ApplicationXVAnnual Operating Cost\*\$0\$232

\*Cooler Application, \$.12 kWh Utility Rate, one 30" x 75" Door Only



VSTB 9-16 Rev B



 Standard Door Rail Options

 SHELF DEPTH OPTIONS
 DOOR WIDTH OPTIONS

 INCHES
 MM
 INCHES

#### Applications:

- Coolers
- Retrofit Designs
- Non-Refrigerated Merchandising

#### **Standard Features:**

- Automatic Hold-Open & Door Stop
- 2-Pane Heated Laminated Glass
- Electrical Hinge Pin
- Torque and Sag Adjust
- T-8 Lighting
- Black/White Epoxy Coated Rear Entry Shelving
- Galvanized Shelf Posts
- Compression Gasket Located on Frame for Longer Gasket Life
- Front-Loading Raceway and U-Shaped Mullion for Easy Service

#### **Options:**

- Anti-Fog
- French Door Frame
- Black/White Epoxy-Coated Shelf Posts
- Extra/36" Deep/Custom Shelves
- Double Wide Shelves
- Gravity Flow Shelving
- Premium Shelving with Mini-Roller System
- Optimax Shelf LED
- Optimax Pro 24 LED
- Clamp Glass Lock Set (2 per Door)
- POM Lock
- Zero Energy Door (Non-Refrigeration Only)
- Energy Controller (Smart Controller)
- Cloze Control<sup>®</sup>

To order today, go to www.anthonyintl.com or call 800-772-0900